

LIGHTING CATALOGUE

www.glowbal.co.nz

Version 7

LED DOWNLIGHT DIMMABLE - SERIES I

INTEGRAL DIMMABLE DRIVER

SPECIFICATIONS:

- LED Chip: Epistar 2535 SMD
- Voltage: 240V/50Hz
- Beam Angle: 100°
- Average Life: 40,000 Hours
- Dimmable: Yes
- IP Rating: IP54



ITEM NO.	MODEL	WATTAGE	CCT	LIGHT OUTPUT	DIMENSIONS	CUT-OUT	CARTON QTY
28511	DL1 - 10WWW	10W	WARM WHITE	840 lm	ø115 x 61mm	90-100mm	30
28512	DL1 - 10WCW	10W	COOL WHITE	920 lm	ø115 x 61mm	90-100mm	30
28513	DL1 - 13WWW	13W	WARM WHITE	1000 lm	ø145 x 61mm	110-120mm	30
28514	DL1 - 13WCW	13W	COOL WHITE	1090 lm	ø145 x 61mm	110-120mm	30

LED DOWNLIGHT DIMMABLE - SERIES II

WITH DRIVER ON BOARD DESIGN

SPECIFICATIONS:

- New Driver on Board (DOB) design
- Average life 30,000 hours
- IP Rating: IP44
- Die-Cast aluminium body
- Fast press fit junction box
- Compatible with most LED dimmers
- Beam Angle 120°



ITEM NO.	WATTAGE	CCT	LIGHT OUTPUT	OUTER DIAMETER & CUT OUT	CARTON QTY
28515	10W	WARM WHITE	750 lm	110MM / 90mm	40
28516	10W	DAY LIGHT	800 lm	110MM / 90mm	40
28517	15W	WARM WHITE	1050 lm	145MM / 120mm	40
28518	15W	DAY LIGHT	1100 lm	145MM / 120mm	40

LED SURFACE DOWNLIGHT

SPECIFICATIONS:

- Surface Mounting
- Aluminum Housing With PMMA Diffuser
- URG < 19 No Glare
- IP40 Dust Proofer




ITEM NO.	MODEL	DIMENSION	POWER	LIGHT OUTPUT	ANGLE	CCT	CARTON QTY
28405	DL32-128C20	ø128 x 128mm	20W	1600lm	100°	3000 K	10

NEW LED BARE BATTENS - T8 E SERIES

SPECIFICATIONS:

- Modern Design
- Electronic Ballasts
- Supplied With Tubes

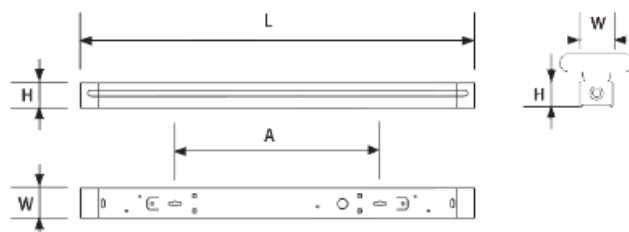

240V
50 Hz

IP
20




ITEM NO.	MODEL NO.	POWER (W)	LAMP HOLDER	DIMENSION (MM) LxWxH	PER CARTON	
					QTY [PCS]	VOLUME [CBM]
38001	New BT-E118	T8 1 x 18W	G13	610 x 51 x 61	12	0.035
38002	New BT-E218	T8 2 x 18W	G13	610 x 121 x 36	12	0.080
38005	New BT-E136	T8 1 x 36W	G13	1210 x 51 x 61	12	0.070
38006	New BT-E236	T8 2 x 36W	G13	1210 x 121 x 36	12	0.140

LED SLIM DIFFUSED BATTEN

SPECIFICATIONS:

- Aluminium Body and PC Diffuser
- IP20 - Dust Proof
- IK08 Anti-Impact



ITEM NO.	MODEL	DIMENSION	POWER	LIGHT OUTPUT	BEAM ANGLE	CCT	CARTON QTY.
28141	LED-BT-S10W	605 x 30 x 43mm	10W	900lm	120°	6500K	20
28142	LED-BT-S20W	1225 x 30 x 43mm	20W	1800lm	120°	6500K	20

LED BATTEN LAMP

SPECIFICATIONS:

- Super Slim Design
- PC Body PC Diffuser
- IP40 - Dust Proof
- IK08 - Anti-Impact




ITEM NO.	MODEL	DIMENSION	POWER	LIGHT OUTPUT	ANGLE	CCT	PF
28406	BTB-B1200 -36	1200 x 75 x 25mm	36W	3000lm	120°	3000-6500K	>0.9

SINGLE BARE BATTENS WITH PHILIPS LED TUBES

SPECIFICATIONS:

- New Slim Battens
- Philips T8 LED Tubes
- Average life 15000 Hours
- Beam Angle 240°
- Lumens: 8w 800, 16w 1600

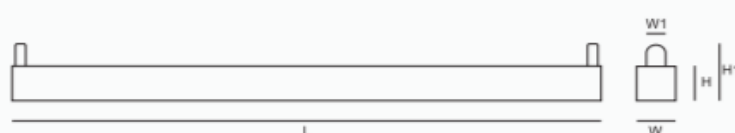

L(mm)	L1(mm)	W(mm)	W1(mm)	H(mm)	H1(mm)
615	-	40	25	20	56
1225	-	40	25	20	56




ITEM NO.	MODEL	DESCRIPTION	CARTON QTY.
28101	BT-E1X2FT	1X2FT BRITEX BLANK BARE BATTEN W/O TUBE	25
28103	PLT-8W2FTDL	PHILIPS T8 2FT LED TUBE 8W 6500K	20
28105	BT-E1X4FT	1X4FT BRITEX BLANK BARE BATTEN W/O TUBE	25
28107	PLT-16W2FTDL	PHILIPS T8 4FT LED TUBE 16W 6500K	20

BARE BATTENS - T8 E SERIES

SPECIFICATIONS:


- Modern Design
- B2 Magnetic Ballasts
- Supplied Without Tubes

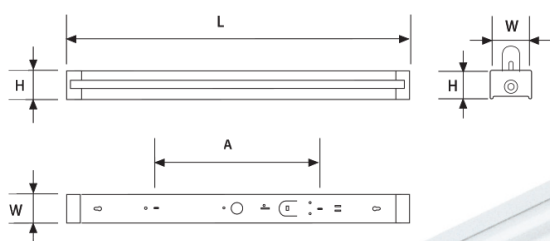

BT-E118, BT-E136



BT-E218, BT-E236

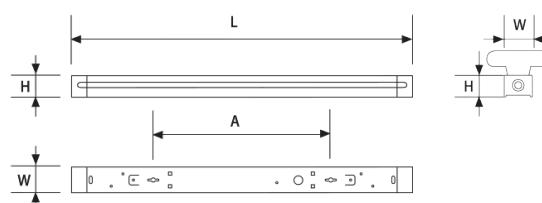

240V
50 Hz

IP
20





ITEM NO.	MODEL NO.	POWER (W)	LAMP HOLDER	DIMENSION (MM)		PER CARTON	
				LxWxH	A	QTY [PCS]	VOLUME [CBM]
28001	BT-E118	T8 1 x 18W	G13	626 x 55 x 42	413	10	0.016
28002	BT-E218	T8 2 x 18W	G13	626 x 55 x 42	413	10	0.016
28005	BT-E136	T8 1 x 36W	G13	1234 x 55 x 42	978	10	0.032
28006	BT-E236	T8 2 x 36W	G13	1234 x 55 x 42	978	10	0.032


DIFFUSED BATTENS - T8 F SERIES

SPECIFICATIONS:



- Modern Design
- Diffuser Made Of Injection-Moulded Crystal Polystyrene (PS)
- B2 Magnetic Ballasts
- Complete With T8 Daylight Tubes

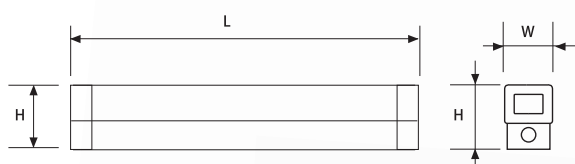

BT-F118, BT-F136

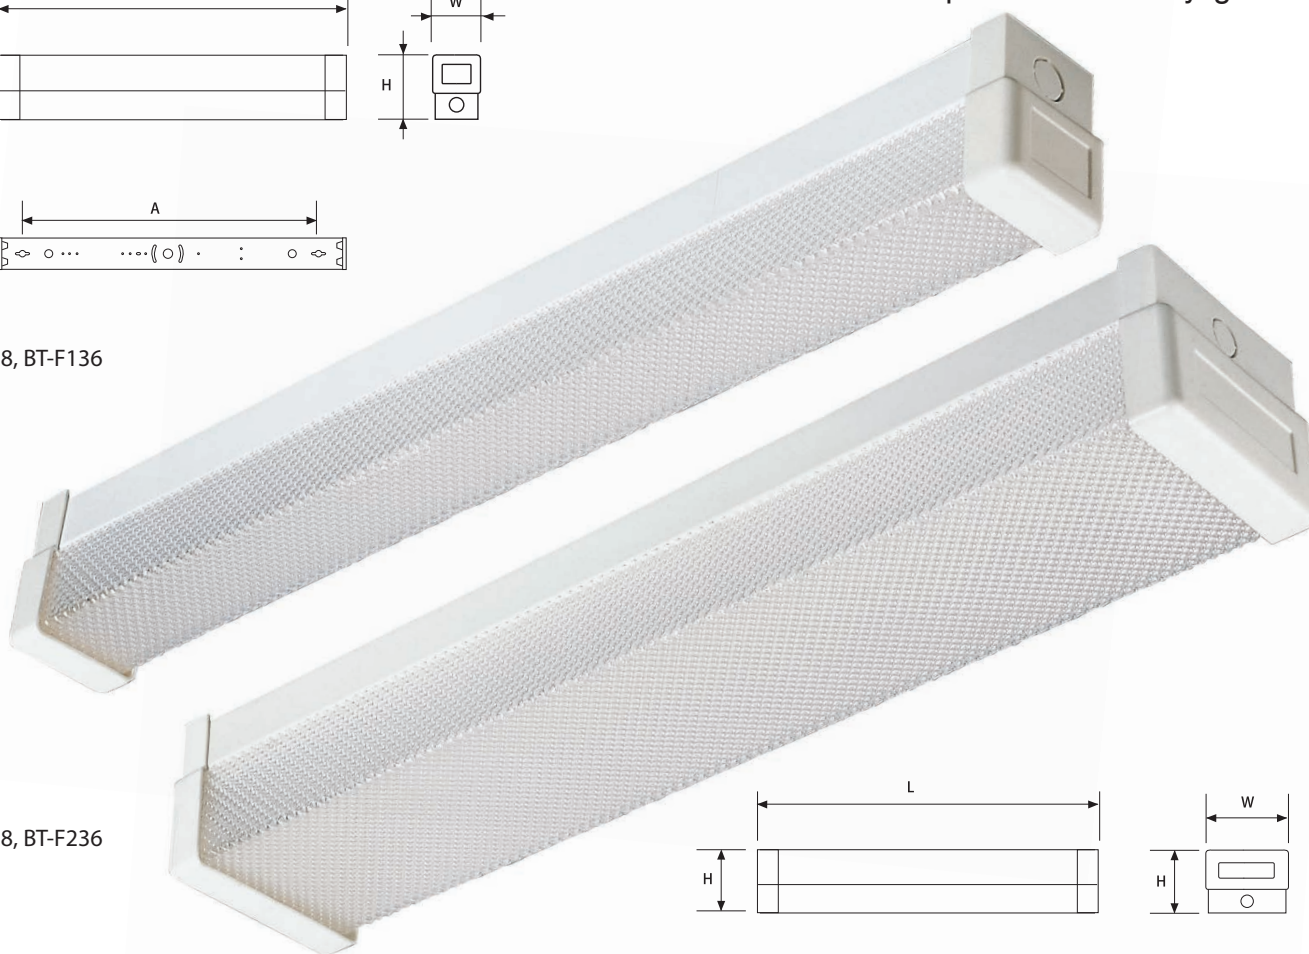

BT-F218, BT-F236

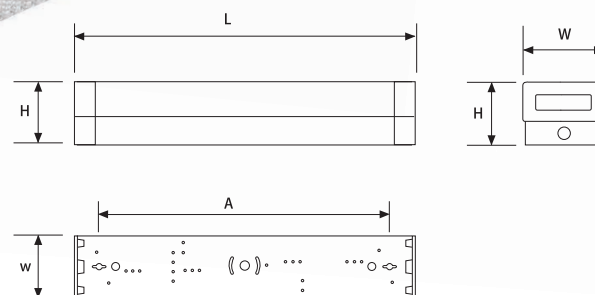

240V
50 Hz


IP
20



ITEM NO.	MODEL NO.	POWER (W)	LAMP HOLDER	DIMENSION (MM)		PER CARTON	
				LxWxH	A	QTY [PCS]	VOLUME [CBM]
28011	BT-F118	T8 1 x 18W	G13	635 x 63 x 85	530	10	0.053
28012	BT-F218	T8 2 x 18W	G13	635 x 120 x 85	530	6	0.054
28015	BT-F136	T8 1 x 36W	G13	1245 x 63 x 93	1150	10	0.103
28016	BT-F236	T8 2 x 36W	G13	1245 x 120 x 93	1150	6	0.110

WEATHERPROOF FLUORESCENT FIXTURES - T8

U SERIES

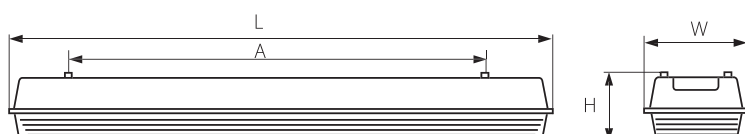

SPECIFICATIONS:

- Polycarbonate Base & Diffuser
- Polycarbonate Clasps to keep Diffuser in Position During Maintenance
- Stainless Steel Mounting Bracket
- B2 Magnetic Ballasts
- Complete With T8 Daylight Tubes

240V
50 Hz

IP
65



SKU NO.	MODEL NO.	POWER (W)	LAMP HOLDER	CLASPS PCS	DIMENSION (MM)		PER CARTON	
					LxWxH	A	QTY [PCS]	VOLUME [CBM]
28020	WP-U118	T8 1 x 18W	G13	6	655 x 85 x 93.5	476	12	0.079
28021	WP-U218	T8 2 x 18W	G13	6	655 x 131 x 93.5	476	8	0.079
28022	WP-U136	T8 1 x 36W	G13	8	1270 x 85 x 93.5	962	9	0.118
28023	WP-U236	T8 2 x 36W	G13	8	1270 x 131 x 93.5	962	6	0.118

TUBES & STARTERS - T8 HALO-PHOSPHOR & LED

HALO-PHOSPHOR



ITEM NO.	MODEL NO.	POWER (W)	LAMP HOLDER	CCT	DIMENSION (MM) LxWxH	PER CARTON QTY [PCS]
28112	FT-F18/D	18W	G13	DAYLIGHT	26 Ø x 604 L	25
28113	FT-F36/D	36W	G13	DAYLIGHT	26 Ø x 1213 L	25
28400	FT-STARTER	4-65W			20 Ø x 40 H	25
28103	PLT-8W2FTDL	8W	G13	DAYLIGHT	27.8 Ø x 602.7 L	20
28107	PLT-16W2FTDL	16W	G13	DAYLIGHT	27.8 Ø x 1212.3 L	20

LED LAMPS RANGE




TYPE	ITEM NO.	WATTAGE	BASE	CCT	LUMEN	DIMENSIONS	SPECIFICATIONS
GU10	28500	3W	GU10	WARM WHITE	250LM	Φ50 H57	DIMMABLE 45° BEAM ANGLE 25,000 HRS
	28501	3W	GU10	DAYLIGHT	250LM	Φ50 H57	
	28502	5W	GU10	WARM WHITE	380LM	Φ50 H57	
	28503	5W	GU10	DAYLIGHT	380LM	Φ50 H57	
	28504	7W	GU10	WARM WHITE	500LM	Φ50 H57	
	28505	7W	GU10	DAYLIGHT	500LM	Φ50 H57	
GLS	28550	3W	E27	WARM WHITE	210LM	Φ45 H82	200° BEAM ANGLE 25,000 HRS
	28551	3W	E27	DAYLIGHT	210LM	Φ45 H82	
	28552	3W	B22	WARM WHITE	210LM	Φ45 H82	
	28553	3W	B22	DAYLIGHT	210LM	Φ45 H82	
	28554	5W	E27	WARM WHITE	400LM	Φ60 H110	
	28555	5W	E27	DAYLIGHT	400LM	Φ60 H110	
	28556	5W	B22	WARM WHITE	400LM	Φ60 H110	
	28557	5W	B22	DAYLIGHT	400LM	Φ60 H110	
	28558	7W	E27	WARM WHITE	560LM	Φ60 H110	
	28559	7W	E27	DAYLIGHT	560LM	Φ60 H110	
	28560	7W	B22	WARM WHITE	560LM	Φ60 H110	
	28561	7W	B22	DAYLIGHT	560LM	Φ60 H110	
	28562	9W	E27	WARM WHITE	800LM	Φ60 H110	
	28563	9W	E27	DAYLIGHT	800LM	Φ60 H110	
	28564	9W	B22	WARM WHITE	800LM	Φ60 H110	
	28565	9W	B22	DAYLIGHT	800LM	Φ60 H110	
GLS COLOR	28580	3W	E27	RED		Φ45 H82	200° BEAM ANGLE 25,000 HRS
	28581	3W	E27	BLUE		Φ45 H82	
	28582	3W	E27	GREEN		Φ45 H82	
	28583	3W	B22	RED		Φ45 H82	
	28584	3W	B22	BLUE		Φ45 H82	
	28585	3W	B22	GREEN		Φ45 H82	
CANDLE	28586	5W	E14	WARM WHITE	400LM	Φ37 H100	270° BEAM ANGLE 25,000 HRS
	28587	5W	E14	DAYLIGHT	400LM	Φ37 H100	
PAR38	28588	15W	E27	WARM WHITE	1500LM	Φ122 H126	IP65 ALU + GLASS COVER 90° BEAM ANGLE 30,000 HRS
	28589	15W	E27	DAYLIGHT	1500LM	Φ122 H126	

ENERGY SAVING LAMPS - T3 2U & 3U



SKU NO.	MODEL NO.	POWER (W)	LAMP HOLDER	CCT	DIMENSION (MM) LxWxH	PER CARTON	
						QTY [PCS]	VOLUME [CBM]
28305	2U-9WESDL	9W	E27	DAYLIGHT	40 Ø x 122 L	50	0.024
28306	2U-9WBCDL	9W	B22	DAYLIGHT	40 Ø x 122 L	50	0.024
28355	2U-11WESDL	11W	E27	DAYLIGHT	40 Ø x 132 L	50	0.024
28356	2U-11WBCDL	11W	B22	DAYLIGHT	40 Ø x 132 L	50	0.024
28325	3U-13WESDL	13W	E27	DAYLIGHT	40 Ø x 130 L	50	0.024
28326	3U-13WBCDL	13W	B22	DAYLIGHT	40 Ø x 130 L	50	0.024
28335	3U-15WESDL	15W	E27	DAYLIGHT	40 Ø x 130 L	50	0.024
28336	3U-15WBCDL	15W	B22	DAYLIGHT	40 Ø x 130 L	50	0.024
28345	3U-20WESDL	20W	E27	DAYLIGHT	43 Ø x 145 L	50	0.026
28346	3U-20WBCDL	20W	B22	DAYLIGHT	43 Ø x 145 L	50	0.026

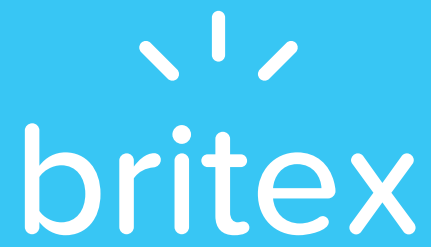

BRITEX

BROUGHT TO YOU BY GLOWBAL NZ LTD

PHYSICAL ADDRESS: 11 Pavilion Drive, Mangere, Auckland, New Zealand
POSTAL ADDRESS: PO Box: 201024, Auckland Airport, Auckland – 2150, NZ.

OFFICE NO: +64 9 254 4500

EMAIL: sales@glowbal.co.nz

www.glowbal.co.nz